

An XML-based Multi-Agent System for Supporting Online Recruitment Services

Pasquale De Meo, Giovanni Quattrone, Giorgio Terracina, and Domenico Ursino

Abstract—In this paper we propose an XML-based multi-agent recommender system for supporting online recruitment services. Our system is characterized by the following features: (i) it handles user profiles for personalizing the job search over the Internet; (ii) it is based on the Intelligent Agent Technology; (iii) it uses XML for guaranteeing a light, versatile and standard mechanism for information representation, storing and exchange. The paper discusses the basic features of the proposed system, presents the results of an experimental study we have carried out for evaluating its performance, and makes a comparison between the proposed system and other e-recruitment systems already presented in the past.

Index Terms—Multi-Agent Systems, XML, E-Services, Recruitment Services.

I. INTRODUCTION

IN the last decade Internet services emerged as a significant, both social and cultural, phenomenon; in fact, presently, many organizations provide their customers with the possibility to access their services also on the Internet.

In this scenario, *online recruitment services*, supporting both *individuals* looking for a job and *companies* looking for employees, are assuming a prominent role. In such a context, generally, companies populate a database of job proposals and individuals are supported in their job search by an engine based on classical Information Retrieval (IR) techniques¹. Several studies show that the number of users accessing these services is dramatically increasing [1]; as a consequence, it is possible to foresee that, in the next years, a huge amount of job proposals will be handled by means of the Internet. In such a situation, classical IR techniques used by the present recruitment services could provide an individual with an excessively large number of job proposals not interesting for him. This could result in a low user perceived quality of service and, ultimately, in his decision to not access these services.

A way for solving this problem consists of realizing *personalized search engines*, which combine classical IR techniques and user modeling methodologies [2]. In the literature some approaches based on *recommender systems* [3] have been proposed to personalize search engines in various application contexts, such as Web browsing [4], e-commerce [5], e-learning [6], and so on. In addition, in some proposals,

recommender systems have been combined with the agent technology for making them *autonomous*, *reactive* and *pro-active* [7]. This paper provides a contribution in this setting; in fact, it proposes an XML-based multi-agent recommender system that exploits rich user profiles to support personalized recruitment services.

Our system is based on the agent technology. In fact, a User Agent is associated with each user and manages his profile, as well as the interaction with him; a Recruitment Agent supports each User Agent in the selection of those job proposals appearing to be the most adequate for the corresponding user. The exploitation of the intelligent agent technology allows our system to improve its autonomy and adaptiveness, as well as to easily partition the various tasks among several entities, thus improving its scalability. Finally, it allows an easy management of existing legacy systems by means of suitable wrappers; as a consequence, our system can easily interact with pre-existing recruitment Web sites and this contributes to enhance the completeness of obtained results.

Our system is XML-based. XML is a standard language for representing and exchanging information. It embodies both representation capabilities, typical of HTML, and data management features, typical of DBMSs. XML information bases are plain text documents and, consequently, they are light, versatile, easy to be exchanged and can reside on different, both hardware and software, platforms. In spite of this simplicity, the information representation rules embodied in this language are powerful enough to allow the management of sophisticated queries.

As for the contribution of our paper in the field of e-recruitment systems, we observe that:

- In order to select the job proposals that best satisfy user requirements, a traditional e-recruitment system considers only the query of the user (that specifies his preferences and constraints), along with the features of available job proposals. On the contrary, our system takes into account not only the query of the user but also his reaction to previous job proposal recommendations it made to him. Moreover, it analyzes similitudes and/or correlations among job proposals to produce its suggestions; in this way, it can highlight some proposals that are usually ignored by traditional e-recruitment systems and that might be appealing for the user.
- In a traditional e-recruitment system, a user can query the corresponding (internal) database. As a consequence, if the system's answer to a query is insufficient, the user must access other e-recruitment systems and re-submit the query; after this, he must compose the results

P. De Meo, G. Quattrone and D. Ursino are with DIMET (Dipartimento di Informatica, Matematica, Elettronica e Trasporti) of University Mediterranea of Reggio Calabria, Reggio Calabria, Italy. G. Terracina is with the Department of Mathematics of University of Calabria, Rende (CS), Italy. Email: {demeo,quattrone,ursino}@unirc.it, terracina@mat.unical.it.

¹See, for example, <http://www.jobfinder.com> or hotjobs.yahoo.com

provided by each system to construct his final list of job proposals. This activity might be time consuming, since the user is obliged to contact and query several e-recruitment systems. In addition, it might be prone to errors, since two e-recruitment systems might exploit different methodologies and use different terminologies to both select and represent job proposals. Specifically, as for methodologies, it could happen that the same job proposal for a user u_i receives contrasting scores by different e-recruitment systems. As a consequence, when u_i compares the results provided by the various systems, he might be confused and, therefore, incapable of making a decision about its suitability for him. As for terminologies, two independent e-recruitment systems might present to a user the same job proposal by exploiting different terms. As an example, a job proposal regarding the design, the development and the validation of software programs might be called “Program Application Support Specialist” by an e-recruitment system, and “Software Test and Software Design Engineer” by another one. In situations like that previously described, since the two systems are totally independent each other, there is no form of coordination and, consequently, no way to inform a user that two or more terms represent the same job proposal.

Our system is capable of facing all these problems; specifically, as it will be clarified in the following, it continuously monitors existing online recruitment services and collects job proposals coming from them; as a consequence, user search is not restricted to the database associated with an e-recruitment system but it spreads across disparate sources. This system organization allows a user to pose his queries in a *transparent* way; in other words, in order to obtain an answer, he could be unaware of the models and the languages of the involved databases, as well as of their internal structure.

As for the Recommender Systems research area, the system we propose in this paper provides the following novelties:

- A traditional Recommender System usually identifies the “Top K ” recommendations, i.e., the K information items (in our case, job proposals) having the highest relevance for the user. The coefficient K is usually constant and pre-defined. In line with current advances [8], our system can analyze user reactions to past proposals to assess if the number of job proposals it presents to users is too low (resp., too high) and, in the affirmative case, it can dynamically augment (resp., reduce) this number.
- In content-based Recommender Systems, a user profile is generally represented as a vector of pairs $\langle k_i, w_i \rangle$, where k_i is a keyword and w_i is a weight denoting the importance of k_i for the user. On the contrary, in our system, user profiles are richer and take into account various characteristics and preferences of involved users. Even if this implies a higher complexity in their management, the improvement of results that can be obtained is very satisfying, as it will be clarified in Section V-E.
- Our approach applies in the Recommender Systems field some mathematic tools generally used in other appli-

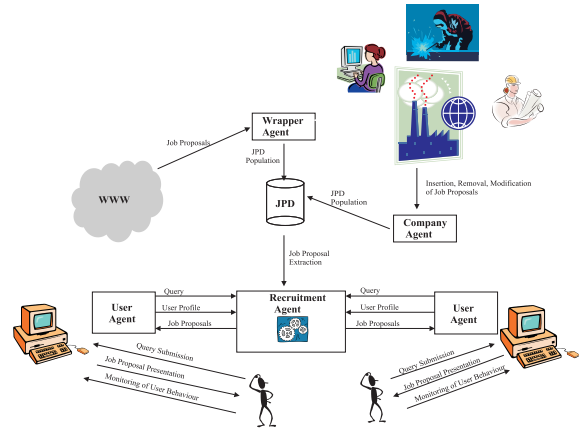


Fig. 1. General architecture of our system

cation contexts, such as *manufacturing engineering* [9], *bioinformatics* [10] and *econometrics* [11]. Interestingly enough, the computational effort it requires is not particularly heavy, as it will be demonstrated in Section IV-B.1.

II. GENERAL ARCHITECTURE OF OUR SYSTEM

Our system consists of two main agent typologies, namely: (i) a *User Agent (UA)*, that manages the profile of a user, as well as the interaction with him, and (ii) a *Recruitment Agent (RA)*, that handles both job proposals and recommendation activities.

Moreover, a Job Proposal Database (*JPD*) is used to store all available job proposals. *JPD* can be populated by companies who can insert, remove or modify job proposals by means of a *Company Agent*, i.e., a suitable Interface Agent, analogous to that described in [12]. In addition, *JPD* can be automatically enriched by suitable *Wrapper Agents*, analogous to that described in [13], that continuously monitor existing online recruitment services, find new job proposals and store them in *JPD*, if they are not already present. *JPD* can be described by an XML document; the corresponding XML Schema is shown in the Appendix available at the address <http://www.ing.unirc.it/ursino/tsmc05/Appendix.pdf>.

Specifically, *JPD* stores a set of job proposals; a job proposal JP_l is described by a tuple $\langle JID_l, JURL_l, JTopicSet_l, JCharacteristicSet_l \rangle$, where:

- JID_l is an identifier;
- $JURL_l$ is the url where the complete description of the job proposal is available;
- $JTopicSet_l = \{JTopic_{c_{l1}}, JTopic_{c_{l2}}, \dots, JTopic_{c_{lm}}\}$ is a set of topics describing JP_l ; a topic is characterized by its name;
- $JCharacteristicSet_l$ is a dynamic set of *characteristics* associated with JP_l . Each characteristic is described by a pair $\langle Feature, Value \rangle$; some of the possible features are the salary associated with the job proposal, the city/country of the job proposal, the foreign languages, the skills, the years of experience and the academic title(s) required from the candidate.

Observe that we have chosen to store available job proposals into an independent knowledge base and not in the ontology

of a specific agent; in this way, several independent and specialized agents can operate in our system to automatically and continuously update and refine them.

The general architecture of our system is shown in Figure 1. Its behaviour is as follows. When a user u_i wants to perform a job search, he submits a query to the associated User Agent UA_i . After this, UA_i contacts RA and provides it with both the query and the profile of u_i . RA selects from JPD the available job proposals satisfying user query, ranks them on the basis of the presumed user preferences and selects those ones that best fit the past interests of u_i , as well as other interests, somehow related to those u_i considered in the past and that he still disregarded. After this, RA sends the selected proposals to UA_i that presents them to u_i ; UA_i monitors u_i and, when he performs his choices, it updates his profile accordingly.

As previously pointed out, the role of XML in our system is crucial. In fact:

- Agent ontologies are stored as XML documents; as a consequence, they are light, versatile, easy to be exchanged and can reside on different hardware and software platforms. In spite of this simplicity, the information representation rules embodied in XML are powerful enough to allow a sophisticated information management.
- The agent communication language adopted in our system is ACML [14]; this is the XML encoding of the standard Agent Communication Language.
- The extraction of information from the various data structures is carried out by means of XQuery [15]. This is becoming the standard query language for the XML environment. Since XQuery is based on the XML framework, it can handle a large variety of data. It has capabilities typical of database query languages as well as features typical of document management systems.
- The manipulation of agent ontologies is performed by means of the Document Object Model (DOM) [16]. DOM makes it possible for programmers to write applications working properly on all browsers and servers as well as on a large variety of both hardware and software platforms.

The architecture of our system can be considered *mixed*, i.e., partially centralized and partially distributed. In this sense it follows the ideas expressed in [17], where an architecture for handling telecommunication networks, based on the presence of an auctioneer agent that carries out most of the negotiation activities, is described. It can be considered centralized for the presence of the Recruitment Agent that performs most of the activities concerning the selection of the job proposals best fitting user exigencies. On the other hand, it can be assumed to be distributed for the presence of many User Agents, Wrapper Agents and Company Agents that continuously cooperate with the Recruitment Agent for performing the whole recruitment task.

Observe that, in our system, there exists only a *central* Recruitment Agent. Such a choice is justified by the following motivations:

- *Network Congestion*. In our architecture, each User Agent is in charge of forwarding both the User Profile and the

user query to the Recruitment Agent that processes this query and sends the corresponding results to it; as a consequence, the two agents exchange a small number of (generally simple) messages and this prevents network overload. In a distributed implementation of the Recruitment Agent activities, various Recruitment Agents would cooperate for processing user queries. As a consequence, they should continuously communicate and exchange messages; this would generate a high network traffic and the whole system would quickly be overwhelmed with messages among agents. This problem is particularly relevant in our reference scenario where the number of job seekers, and consequently of User Agents, is very high; this would cause an overwhelming amount of exchanged messages and, ultimately, significant latencies and users dissatisfaction.

- *Task Assignment*. In a distributed implementation of the Recruitment Agent activities, a query is propagated through several Recruitment Agents that spend memory and CPU resources to process it. In this scenario, it could happen that some Recruitment Agents would be overwhelmed with requests, whereas other ones would be almost unoccupied. In order to optimize the system performances, it would be necessary to define protocols for intelligently assigning tasks to the various Recruitment Agents. These protocols appear very complex to be realized because the potential job seekers (and, consequently, the potential User Agents) might be very numerous and geographically sparse.
- *Message Duplication*. In a distributed implementation of the Recruitment Agent activities, multiple copies of a query might be received by the same Recruitment Agent (we call these copies *duplicated messages*). To better clarify this concept and its consequences, consider four Recruitment Agents RA_{d1} , RA_{d2} , RA_{d3} and RA_{d4} , and assume that: (i) a user submits a query $\bar{Q}$ to RA_{d1} ; (ii) RA_{d1} is not capable of answering $\bar{Q}$; (iii) RA_{d1} asks RA_{d2} and RA_{d3} to answer $\bar{Q}$; (iv) RA_{d2} and RA_{d3} are only capable of producing a partial answer to $\bar{Q}$ (e.g., the number of job proposals retrieved by them is lesser than that required by the user); (v) RA_{d2} and RA_{d3} might *independently* forward $\bar{Q}$ to RA_{d4} that would receive and, in its turn, could process and possibly transmit $\bar{Q}$ twice. This example clearly shows that duplicated messages are pure overhead; they increase the network congestion and determine a waste of CPU and memory resources for the Recruitment Agents that are often obliged to process the same query more than once. In spite of the resource waste caused by them, they do not improve system accuracy since they do not contribute to increase the chance of finding job proposals relevant for user. These problems are emphasized in an e-recruitment scenario, where the number of job seekers contemporarily accessing our system could be very high; in this case, the probability of duplicating messages might be extremely high. As a consequence, suitable mechanisms for identifying duplicated messages and avoiding to process and forward them are required; however, these mechanisms

are generally difficult to be designed and implemented.

Interestingly enough, these motivations are in accordance also with the ideas illustrated in [18].

Finally, we would like to point out that our system does not provide for any additional layer between the User Agent and the Recruitment Agent. This choice is justified by the following motivations:

- *Ability to cooperate with other e-recruitment systems.* One of the most important capabilities of our system consists of its ability to effectively cooperate with other e-recruitment systems (see below). A layered architecture does not appear particularly suitable for pursuing such an objective. In fact, in a layered architecture, system functionalities are associated with different abstraction levels, each represented by a layer; the abstraction degree generally increases from the lowest levels to the highest ones. The presence of different abstraction levels has the following consequences:
 - The interaction between two layered systems requires each of them to have a deep knowledge of the architectural features of the other one. In fact, each system should know the abstraction level associated with each layer of the other system to properly exchange information and cooperate. Such a knowledge is often missing and, hence, the mapping from a layer in a system to a layer in another one might be not obvious and, in some cases, not possible.
 - Many systems cannot be easily structured in a layered fashion. As a consequence, if our system would be layered, we could have a scenario in which layered and non-layered architectures coexist; in this case, suitable communication protocols between layered and non-layered systems are compulsory; their realization, however, is often a hard and expensive activity.
- *Performance Issues.* Several studies point out that the number of users accessing e-recruitment systems is rapidly increasing [1]. As a consequence, an e-recruitment system should be capable of quickly processing user queries. Such a requirement cannot be easily satisfied in a layered system; in fact, in this case, each layer supplies services to the layer above it and operates as a client for the layer below it. Therefore, in a layered system, a continuous message exchange between low-level layers and the high-level ones is required. Since a message often has to pass through many layers, the overhead associated with message exchange is often significant and might determine a performance decay. Various techniques have been proposed to boost the performances of a layered system (e.g., it is possible to couple non-adjacent layers) but they seem too difficult to be realized in practical contexts, especially in our application case where the various layers could belong to different owners.
- *Reliability Issues.* The fast identification of faults and the quick reaction to them cannot be easily performed in a layered architecture since a failure in a layer might

determine the crash of the whole system. Even the (possibly non fast) fault identification might be difficult to be carried out since the functionalities of the low-level layers are often hidden to the high-level ones and, consequently, an application running on high-level layers has many difficulties in identifying where a certain problem has occurred.

In the following sections we provide a detailed description of the two main agents involved in our system, namely the User Agent and the Recruitment Agent.

III. THE USER AGENT

A. Ontology

The ontology of the User Agent UA_i , associated with a user u_i , stores the profile of u_i . It contains:

- The code UID_i identifying u_i .
- A set $TopicSet_i$ storing the preferences of u_i ; each preference corresponds to a topic which u_i looked for in the past. Each element $Topic_{i_j}$ of $TopicSet_i$ is represented by a tuple $\langle TopicName_{i_j}, Count_{i_j}, FirstTimeStamp_{i_j} \rangle$, where: (i) $TopicName_{i_j}$ indicates the name of $Topic_{i_j}$; (ii) $Count_{i_j}$ is an *access counter* denoting how many times $Topic_{i_j}$ has been specified in a query submitted by u_i ; (iii) $FirstTimeStamp_{i_j}$ indicates the first time instant in which $Topic_{i_j}$ has been specified in a query of u_i . As it will be clarified in the following, these last two coefficients allow the relevance of $Topic_{i_j}$ for u_i to be measured.
- A dynamic set $ConstraintSet_i$ of constraints that u_i fixes for the desired job. Each constraint is described by a pair $\langle Feature, Value \rangle$; some of the possible constraints are the minimum salary u_i would like to earn, the city/country where he desires to work, the foreign language(s) he knows, his skills, the years of experience he has attained, and his academic title(s).
- A set $PastQueries_i$, storing information about the queries that u_i posed to the system in the past. Each element of $PastQueries_i$ consists of a pair $\langle \sigma_i^k, \alpha_i^k \rangle$. σ_i^k is the *satisfaction* coefficient; it belongs to the real interval $[0, 1]$ and indicates how much u_i appreciated the recommendations provided by the system as a response to his k^{th} query. In the literature many proposals have been presented to measure the satisfaction of a user for a set of recommendations (see, for example, [19], [20]). In this paper we follow the ideas illustrated in [20] and define σ_i^k as follows. Let $JPList_i^k$ be the set of job proposals recommended by the system as a response to the k^{th} query of u_i and let $AcceptedJP_i^k$ be the set of job proposals accepted by u_i ; σ_i^k can be defined as $\sigma_i^k = \frac{|AcceptedJP_i^k|}{|JPList_i^k|}$. α_i^k is the *audacity* coefficient; it belongs to the real interval $[0, 1]$; the higher α_i^k is, the higher the number of job proposals returned by the system as its answer to the query Q_i^k will be. α_i^k is computed by the Recruitment Agent; the various strategies for its computation are shown in Section IV-B.1; they have been designed in

such a way to make our system adaptive against the past behaviour of u_i .

The XML Schema associated with the ontology of UA_i is shown in the Appendix.

B. Behaviour

The behaviour of UA_i consists of the following steps.

- *Step 1.* When u_i wants to perform a job search, UA_i supports him in the construction of a corresponding query Q_i^k by means of a suitable wizard. Q_i^k consists of a pair $\langle SelDegree_i^k, QTSet_i^k \rangle$. $SelDegree_i^k$, belonging to the real interval $[0, 1]$, is the *Selectivity Degree*; it indicates how much the system should be selective in the search of proposals (see below); the wizard associated with UA_i proposes to u_i some possibilities and he chooses the most suitable one for him in a friendly, guided manner. $QTSet_i^k = \{QTopic_{i_1}^k, \dots, QTopic_{i_q}^k\}$ is the set of topics describing the job proposals currently interesting for u_i .
Moreover, if u_i wants to update the constraints for a desired job, UA_i provides him with a suitable graphical interface that allows him to view the constraints he has defined, as well as to add, drop or modify some of them.
- *Step 2.* UA_i updates $TopicSet_i$; this task is performed by inserting in it those topics of Q_i^k not already present therein and by increasing the access counters of the topics corresponding to $QTopic_{i_1}^k, \dots, QTopic_{i_q}^k$.
- *Step 3.* UA_i contacts RA and supplies it both Q_i^k and the profile of u_i . RA selects the job proposals answering Q_i^k that best fit the past interests of u_i , as well as other interests, somehow related to those u_i considered in the past and that he still disregarded. Then, it sends to UA_i both the selected job proposals and the audacity coefficient α_i^k it used.
- *Step 4.* UA_i presents to u_i the job proposals provided by RA . u_i accepts those ones appearing to be the closest to his exigencies and rejects the other ones. After this, UA_i computes the satisfaction degree σ_i^k that u_i showed for the provided recommendations, and stores the pair $\langle \sigma_i^k, \alpha_i^k \rangle$ into $PastQueries_i$.
- *Step 5.* In order to avoid an excessive growth of $TopicSet_i$, UA_i executes a pruning activity on it. Such a task is carried out by computing the relevance for u_i of each topic $Topic_{i_j}$ stored in $TopicSet_i$ and by removing from $TopicSet_i$ those topics presenting a relevance smaller than a certain threshold. The *relevance* of $Topic_{i_j}$ at the time instant T is computed by means of the formula $r(Topic_{i_j}, T) = \frac{Count_{i_j}}{T - FirstTimeStamp_{i_j}}$. This formula is justified by considering that the more a user is interested in a topic, the more frequently he asks information about it.

In order to show the exploitation of ACML and XQuery in our system, in the Appendix, we present the ACML message that UA_i sends to RA for requiring a set of recommendations and the query that UA_i executes for identifying those topics of Q_i^k not already present in $TopicSet_i$.

C. Influences of job market specifics in the design of the User Agent architecture

The design of our User Agent model has been influenced by various job market specifics. In the following we examine the most relevant of them.

1) *Construction of a network of job seekers:* Several studies point out the importance of constructing a job seeker network (JSN), i.e., a community of job seekers that share and exchange information about their past job experiences. A JSN is an effective channel for disseminating job information and can successfully support its users in their job search: as an example, a study presented in [21] shows that the probability of a user to find a job grows with the increase of the size of the network he belongs to.

Actually, the construction of a *JSN* is a delicate activity. In fact, job seekers, due to both selfishness and rivalry, might be unwilling to cooperate. To overcome this drawback, it is necessary to create a free-of-competition environment based on trustful relationships among its members. In order to carry out this task, it is necessary to enhance the cooperation among job seekers belonging to the same job context for whom a rivalry might not exist; think, for example, to job seekers having different experience degrees (e.g., a senior software programmer who helps a newly graduated person to find his first job).

The experience shows also that information sharing among members of a JSN increases their capability of posing precise queries. In fact, users accessing e-recruitment services are extremely heterogeneous: job seekers having a deep knowledge of a job domain often coexist with other seekers having a superficial knowledge of it. An expert is capable of formulating a query that really captures his needs; on the contrary, a novice might ignore the information content of the database storing available job proposals and, consequently, might be unable to formulate precise queries. As previously pointed out, a JSN might support novices to compose their queries; specifically, a novice might ask the experts of a JSN to support him in his query composition.

Our User Agent model has been designed in such a way to facilitate the creation of a JSN; specifically, a User Agent UA_i , on behalf of u_i , could contact other User Agents for finding job seekers having a profile similar to u_i but being more expert than him; such a task can be carried out by taking into account the lists of topics specified in user profiles and by comparing them by means of the Jaccard Coefficient [22]. When the list of job seekers similar to u_i is available, u_i can ask UA_i to activate a contact with one or more of them in such a way to require a support to formulate his queries.

2) *Integration with e-learning systems:* Several studies point out that the capability of a job seeker to continuously update his know-how has a significant implication on the success of his job search, as well as on the advancement of his career; as a consequence, learning activities should be regarded as a lifelong process. For this reason a strict integration between e-recruitment and e-learning systems might provide a job seeker with a significant competitive advantage.

A key component of most e-learning systems is the so-called student profile, storing information about the student

background knowledge and information needs. In this way, it is possible to diversify the learning process on the basis of user skills and necessities.

Our User Agent model can make the interaction between our system and an e-learning one easier; specifically, a User Agent could transfer the corresponding User Profile to an e-learning system that might construct an initial student profile starting from it. Conversely, the profile of a student that acquired some skills with the support of an e-learning system could be exploited to construct an initial user profile for the User Agent of our e-recruitment system.

3) *Efficient retrieval of curricula*: Presently, a large number of curricula vitae is available on the Internet. Generally, a curriculum consists of a title and a set of additional information provided by the job seeker (e.g., his past experience). These curricula can be consulted by businesses; a common way to do this activity is the so called “curricula spidering”, i.e., the exploitation of a software agent that tracks down curricula and finds those of interest for businesses.

The search of curricula is generally performed by means of a traditional search engine; in this case the business manager specifies some words to the engine and this last searches for those curricula containing these words. These techniques might lead to irrelevant and spurious results; in fact, a curriculum might be too vague; it might be not updated; last, but not the least, the words appearing in a curriculum might not belong to the vocabulary of terms used by business managers in their searches.

Our User Agent model is capable of enhancing the curricula search capabilities of businesses; in fact:

- A User Agent is in charge of monitoring the behaviour of its user and this allows it to maintain the corresponding profile always updated.
- A User Agent learns the profile of its user on the basis of the job proposals that he searches for and, eventually, accepts or rejects. In this way, the topics specified in a User Profile derive from the job proposal features directly inserted by businesses; such a policy avoids ambiguity, that could arise when a term present in a traditional curriculum could be interpreted in more than one way by a business manager, and protects the job seeker against his lack of knowledge of the terms that are currently used by businesses.

IV. THE RECRUITMENT AGENT

A. Ontology

The ontology of a Recruitment Agent RA consists of a set of job proposals; as pointed out in Section II, a Job Proposal JP_l is described by a tuple $\langle JID_l, JURL_l, JTopicSet_l, JCharacteristicSet_l \rangle$.

The XML Schema associated with the ontology of RA is shown in the Appendix.

B. Behaviour

RA is activated by UA_i when u_i wants to perform a query Q_i^k for searching job proposals. It receives Q_i^k and the profile of u_i ; it returns to UA_i : (i) the job proposals answering Q_i^k

that best fit the past interests of u_i , as well as other interests, somehow related to those u_i considered in the past and that he still disregarded; (ii) the audacity coefficient α_i^k it used to select the job proposals. In order to perform its activity, RA carries out the following steps:

- *Step 1*. It queries JPD for retrieving the job proposals matching Q_i^k (*keyword-based filtering*) and satisfying user constraints (*feature-based filtering*); to this purpose it applies classical Information Retrieval techniques [23].
- *Step 2*. It ranks the selected proposals on the basis of user preferences, as stored in $TopicSet_i$. Such a task is carried out as follows: let $JP_l = \langle JID_l, JURL_l, JTopicSet_l, JCharacteristicSet_l \rangle$ be a job proposal and let $TS_{il} = \{Topic_{ij} \mid Topic_{ij} \in TopicSet_i, TopicName_{ij} \in JTopicSet_l\}$ be the set of topics of JP_l appearing to be interesting for u_i . RA assigns an interest degree to JP_l , for the user u_i at the current time instant T , according to the formula $\rho(TS_{il}, T) = \sum_{Topic_{ij} \in TS_{il}} r(Topic_{ij}, T)$.

Here, the relevance r has been defined in Section III-B. Clearly, the higher the value of $\rho(TS_{il}, T)$ is, the higher the relevance of JP_l for u_i will be. At the end of this phase, RA constructs $JPTempList_i^k$, obtained by sorting the selected job proposals on the basis of their interest degrees.

Observe that a more complex formula could be adopted for ρ . However, in this way, the complexity of the Recruitment Agent would unnecessarily increase. In fact, since, during the selection of job proposals, our approach takes into account also user past preferences and satisfaction, a simple ranking function is sufficient. This is confirmed also by the experimental results shown in Section V.

$JPTempList_i^k$ is already a good candidate to be presented to u_i . However, two further improvements could be performed by RA to make it more adequate. Firstly, we observe that $JPTempList_i^k$ ranks the job proposals on the basis of their relevance for u_i , according only to his *past preferences*; however, it does not consider topics, somehow related to those u_i considered in the past and that he still disregarded. Secondly, $JPTempList_i^k$ could still contain quite a large number of proposals. The next steps performed by RA are devoted to carry out these improvements.

- *Step 3*. RA constructs the set $SeedProposals_i^k$ obtained by selecting the first $\lceil SelDegree_i^k \times |JPTempList_i^k| \rceil$ proposals of $JPTempList_i^k$. The elements of $SeedProposals_i^k$ are used by RA as seeds to choose other job proposals containing topics, somehow related to those u_i considered in the past and that he still disregarded.
- *Step 4*. RA constructs the final list $JPList_i^k$ of recommended job proposals as $JPList_i^k = SeedProposals_i^k \cup \{JP_l \mid JP_l \in JPTempList_i^k, JP_m \in SeedProposals_i^k, \delta(JP_l, JP_m) \leq \alpha_i^k\}$. Here $\delta(JP_l, JP_m)$ measures the “dissimilarity degree” between JP_l and JP_m . It is defined as $\delta(JP_l, JP_m) = 1 - \frac{2|JTopicSet_l \cap JTopicSet_m|}{|JTopicSet_l| + |JTopicSet_m|}$, where $JTopicSet_l$ and $JTopicSet_m$ represent the sets of topics associated

with JP_l and JP_m , respectively, and the symbol $|S|$ represents the cardinality of a set S . Interestingly enough, the value $\frac{2|S_1 \cap S_2|}{|S_1| + |S_2|}$ is known as Dice's coefficient in the literature. It is easy to show that δ ranges between 0 (if the two job proposals coincide) and 1 (if the two job proposals are completely different).

The audacity coefficient α_i^k is dynamically computed by RA on the basis of the feedback that u_i showed for past recommendations. In this paper we propose three different strategies for the computation of this coefficient; they are extensively described in Section IV-B.1.

$JPList_i^k$, obtained at the end of this step, contains at least the seed proposals; moreover, it could include also some job proposals relative to topics not particularly relevant for u_i in the past, but that could be of interest for him in the future (since they are sufficiently similar to those he judged relevant in the past). In the selection of this last category of proposals δ plays a key role; in fact, it measures the dissimilarity degree of two job proposals on the basis of their topics, i.e., of their meaning and semantics, without considering the relevance that u_i assigned to them in the past.

- Step 5. RA sends $JPList_i^k$ and α_i^k to UA_i .

1) *Strategies for the audacity computation:* In our system we have chosen to dynamically update the audacity coefficient after each query performed by the user u_i . This allows it to be very sensitive to the user judgements about its recommendations and significantly improves its accuracy. However, this makes the manual update of the audacity coefficient a very difficult task. In fact, in our opinion, asking the user to manually update the audacity coefficient after each query is obtrusive. In addition, even with the exploitation of suitable graphic interfaces, the user could be not capable of understanding the role of the audacity coefficient and to choose the most correct value for it.

However, in our prototype, in order to consider the possible presence of very smart users, we have inserted a module allowing a smart user to personally modify the values of the audacity coefficient determined by the system.

In this section we illustrate three different strategies that may be used for automatically computing the audacity coefficient α_i^k that RA associates with Q_i^k . Recall that the higher this coefficient is, the higher the number of job proposals returned by the system for answering Q_i^k will be; this strictly depends on the satisfaction that u_i showed for the recommendations of RA in the past. As a consequence, any strategy for the computation of α_i^k must evaluate the satisfaction of u_i w.r.t. the previous recommendations of RA . As previously pointed out, the choice to make audacity dependent on satisfaction allows our system to be adaptive against the past behaviour of u_i .

a) *Strategy 1: Positive and Negative Feedback (PNF).*

In this strategy, α_i^k is dynamically updated on the basis of the feedback provided by u_i for the last recommendation; this is encoded in the satisfaction coefficient σ_i^{k-1} relative to the recommendations associated with the query Q_i^{k-1} . Recall that σ_i^{k-1} is the fraction of job proposals accepted by u_i w.r.t. those recommended by the system when it answered Q_i^{k-1} .

PNF works as follows:

- If, during the execution of Q_i^{k-1} , the number of accepted recommendations has been greater than the number of the rejected ones (i.e., $\sigma_i^{k-1} > \frac{1}{2}$), then it is possible to argue that u_i has appreciated the system recommendations, since he accepted most of them. As a consequence, if the system would send further recommendations, it is extremely probable that u_i would receive other proposals interesting for him. Now, since in our system the amount of proposals sent to the user as the answer to the query Q_i^k is strictly related to the audacity coefficient α_i^k , increasing this coefficient would imply an increase of the number of proposals recommended by the system when answering Q_i^k .

Clearly, the key issue in this reasoning is the correct estimation of the increase of α_i^k . In fact, if such an increase is too high, then u_i would receive several useless proposals and his perceived quality of the overall recommendations could decrease. On the contrary, if the increase is too low, the system could miss to recommend some proposals interesting for u_i . The previous reasoning led us to define the increase ε_i^k to apply on the audacity α_i^{k-1} for obtaining α_i^k as a linear function of the user satisfaction; formally, $\varepsilon_i^k = \sigma_i^{k-1} - \frac{1}{2}$. This formula shows that the more u_i is satisfied, the more σ_i^{k-1} is higher than $\frac{1}{2}$ and the more α_i^k is increased w.r.t. α_i^{k-1} . Clearly, other functions could be adopted for ε_i^k , e.g., logarithmic, quadratic, cubic or exponential functions; however, in our opinion, the linear function is the most suitable one to satisfy the contrasting exigencies mentioned above and to provide the system with the correct balance between stability and readiness in adapting its behaviour to user satisfaction (see the Appendix for an experimental analysis of this topic).

- If, during the execution of Q_i^{k-1} , the number of rejected recommendations has been greater than the number of the accepted ones (i.e., $\sigma_i^{k-1} < \frac{1}{2}$), then it is possible to argue that u_i has disliked system recommendations, since he refused most of them, and that he is interested to examine fewer proposals during the next queries. As previously pointed out, the number of system recommendations depends on α_i^k ; therefore, in order to make the system to recommend fewer proposals to u_i , it is necessary that α_i^k is lower than α_i^{k-1} . For the same reasoning introduced in the previous case, the most suitable function for defining the decrease ε_i^k to apply to α_i^{k-1} for obtaining α_i^k appears the linear one. More formally, the decrease ε_i^k can be defined as $\varepsilon_i^k = \frac{1}{2} - \sigma_i^{k-1}$.
- The last possible situation happens when the number of accepted proposals has been equal to the number of the rejected ones (i.e., $\sigma_i^{k-1} = \frac{1}{2}$). This situation can be seen as a specific case of both the first and the second situations described above. If it is considered as a particular case of the first (resp., second) situation, the increase (resp., decrease) ε_i^k is equal to 0 and, consequently, it is possible to conclude that the number of recommendations should be neither increased

nor decreased; this implies that the audacity coefficient should be maintained constant.

The previous reasoning leads to the following formula for computing the new value of α_i^k :

$$\alpha_i^k = \begin{cases} \min\{1, \alpha_i^{k-1} + \varepsilon_i^k\} & \text{if } \sigma_i^{k-1} > \frac{1}{2} \\ \alpha_i^{k-1} & \text{if } \sigma_i^{k-1} = \frac{1}{2} \\ \max\{0, \alpha_i^{k-1} - \varepsilon_i^k\} & \text{if } \sigma_i^{k-1} < \frac{1}{2} \end{cases}$$

This formula is valid when u_i exploits the system at least for the second time. During the first query α_i^1 is set equal to a constant value $\bar{\alpha}$. An analysis of the impact of $\bar{\alpha}$ on the system performance is reported in the Appendix.

b) Strategy 2: 2-Least Square Error (2-LSE).

This strategy is based on the Least Square Error technique (LSE) that is largely exploited in several research areas, such as *manufacturing engineering* [9], *bioinformatics* [10], *econometrics* [11], and so on. LSE considers two sets $X = \{x_1, x_2, \dots, x_N\}$ and $Y = \{y_1, y_2, \dots, y_N\}$ and a function $y = f(x, a_0, a_1, \dots, a_p)$ depending on $p+1$ unknown parameters but having a predefined form (e.g., f might be a polynomial, a linear combination of exponentials, a sinusoid, and so on). The goal of LSE is to identify the values $a_0^*, a_1^*, \dots, a_p^*$ of the parameters $a_0, a_1, \dots, a_p$ such that the residual $R = \sum_{l=1}^N (y_l - f(x_l, a_0^*, a_1^*, \dots, a_p^*))^2$ is minimum. In such a case it is said that $f(x, a_0^*, a_1^*, \dots, a_p^*)$ is the function that best “fits” the sets X and Y , in the least squares sense.

In order to compute α_i^k , this strategy:

- Applies the LSE technique for determining the values $a_0^*, \dots, a_p^*$ of the parameters $a_0, \dots, a_p$ of the fitting function. To this purpose, it exploits the sets $X = \{\alpha_i^1, \alpha_i^2, \dots, \alpha_i^{k-1}\}$ and $Y = \{\sigma_i^1, \sigma_i^2, \dots, \sigma_i^{k-1}\}$. Observe that, as a consequence of this choice for the sets X and Y , the fitting function represents the user satisfaction against the system audacity.
- Sets α_i^k to the value of the audacity corresponding to the maximum value² of the fitting function and, consequently, to the maximum value of the user satisfaction.

A crucial problem in the implementation of the LSE strategy is the choice of both the shape and the parameters of the fitting function. Such a choice must minimize the residual R ; as a consequence, it requires to compute the partial derivatives of R and to solve the set of equations $\frac{\partial R}{\partial a_j} = 0, \forall j = 0, \dots, p$.

If we use, as fitting function, a combination of sinusoids, logarithms and exponentials, these equations generally define a non-linear system that, often, cannot be exactly solved; in this case, even the calculation of an approximate solution requires an heavy computational effort.

On the contrary, if the fitting function has a polynomial shape, i.e., $f(x, a_0, a_1, \dots, a_p) = a_0x^p + a_1x^{p-1} + \dots + a_p$, it is possible to show that these equations are equivalent to the linear system [24] $\mathbf{A}\mathbf{x} = \mathbf{b}$, where $\mathbf{A}$ is a matrix called *Vandermonde matrix*. It is possible to show that at least an approximate solution of this system can be computed in a

polynomial time; generally, the exact solution can be computed in $O(p^2)$ steps [24]; as a consequence, a polynomial shape for the fitting function appears well suited for our purposes.

The next step of our activity consists of determining the order of the polynomial to be used as fitting function. To this purpose observe that LSE must compute the audacity value that maximizes the fitting function $f(x)$; to compute this value we need to determine the derivative $f'(x)$ of $f(x)$ and to solve the equation $f'(x) = 0$. Now, if $f(x)$ is a p^{th} order polynomial, $f'(x)$ will be a $(p-1)^{th}$ order polynomial; as a consequence, we have that: (i) if $p = 2$ (i.e., if the fitting function is a parabola), it is possible to directly obtain an exact solution of $f'(x) = 0$ by solving a first order equation; (ii) if $p = 3$ (i.e., if the fitting function is a cubic), it is possible to obtain an exact solution of $f'(x) = 0$ by solving a second order equation; (iii) if $p > 3$, the computation of the roots of $f'(x)$ can be performed by means of numerical (and approximate) techniques; with regard to this, it was shown that the time necessary for finding all the roots of $f'(x) = 0$ with a maximum error equal to $\frac{1}{2\pi}$ is $O(p \log p^4 + p \log^2 p \log b)$ [25].

This analysis shows that, for obtaining a correct (i.e., not approximate) solution of the equation $f'(x) = 0$, the fitting function must be either a parabola or a cubic. Since the accuracy ensured by the polynomial of degree 2 (i.e., the parabola) is high [26], and since the computation time it requires for solving $f'(x) = 0$ is lower than that necessary if the fitting function is a cubic, we have adopted the parabola as fitting function; in this case the LSE technique is called 2-LSE technique.

Therefore, in our case, the fitting function is $y = a_0x^2 + a_1x + a_2$; this choice implies that the 2-LSE strategy is valid only when u_i exploits the system at least for the fourth time. During the first three queries $\alpha_i^1, \alpha_i^2, \alpha_i^3$ are set equal to three constant values $\bar{\alpha}', \bar{\alpha}'', \bar{\alpha}'''$, respectively. An analysis of the impact of $\bar{\alpha}', \bar{\alpha}'', \bar{\alpha}'''$ on the system performance is reported in the Appendix.

c) Strategy 3: Weighted Sum (WS).

In order to compute α_i^k , this strategy applies the PNF and the 2-LSE strategies and obtains two audacity values $\alpha_i^{k,PNF}$ and $\alpha_i^{k,2-LSE}$. The overall audacity value α_i^k is obtained by computing a suitable weighted mean of $\alpha_i^{k,PNF}$ and $\alpha_i^{k,2-LSE}$; specifically, $\alpha_i^k = \gamma \times \alpha_i^{k,PNF} + (1 - \gamma) \times \alpha_i^{k,2-LSE}$. Here, γ is a coefficient ranging in the real interval $[0, 1]$. Specifically, if $\gamma = 1$, the WS strategy coincides with the PNF strategy; on the contrary, if $\gamma = 0$, the WS strategy coincides with the 2-LSE strategy. In our experiments we have considered different values for γ and we have studied their impact on the system performance (see the Appendix for more details); in addition, we have examined how to dynamically compute γ for maximizing the system performances.

V. EXPERIMENTAL RESULTS

In this section we describe in detail the various experiments we have conducted for testing the performance of our system. Specifically, in Section V-A we describe the characteristics of both the users and the job proposals considered in our

²Observe that, since the independent variable (i.e., the audacity) belongs to the compact interval $[0, 1]$, the fitting function has always a maximum within this interval.

tests; Section V-B presents the accuracy measures we have chosen for testing our approach. Section V-C is devoted to make a comparison of the three strategies for the audacity computation. In Section V-D we evaluate the performance of our system in different application domains. Finally, Section V-E is devoted to present an experimental comparison of our system with other e-recruitment ones.

In order to perform our tests, we have designed a prototype implementing our approach. This prototype has been developed in JADE³ (Java Agent DEvelopment framework), a software framework conceived for supporting the implementation of agent-based applications in compliance with FIPA specifications [27].

A. Characteristics of the users and job proposals

In our tests we have considered a set of users $USet = \{u_1, u_2, \dots, u_{200}\}$ consisting of 200 volunteers. As for their distribution against their age we have that: (i) 21.00% of them was 18-24 years old; (ii) 39.00% of them was 25-34 years old; (iii) 25.50% of them was 35-44 years old; (iv) 13.50% of them was 45-54 years old; (v) 1.00 % of them was more than 54 years old.

As for their distribution against their past usage to commercial e-recruitment systems we have that: (i) 11.00% of them had never used a commercial e-recruitment system; (ii) 10.00% of them exploited it very rarely; (iii) 10.00% of them used it rarely; (iv) 25.50% of them exploited it sometimes; (v) 31.00% of them exploited it often; (vi) 12.50% of them used it very often.

The available job proposals, extracted from the sites <http://www.jobpilot.co.uk> and <http://www.careerbuilder.com> were about 3000. They belonged to different domains; specifically, reference domains where: (i) “Information Technology” for 19.29% of them; (ii) “Health Care Management” for 17.02% of them; (iii) “Finance” for 15.84% of them; (iv) “Engineering” for 12.07% of them; (v) “Banking” for 10.04% of them; (vi) “Legal” for 7.02% of them; (vii) “Real Estate Management” for 5.26% of them; (viii) “Others” for 13.46% of them.

B. Evaluation Measures

In our tests we have computed two widely accepted evaluation measures, namely *Precision* and *Recall*. Precision is defined as the share of job proposals accepted by u_i among those recommended by the system; Recall is the share of job proposals suggested by the system among those of interest for u_i .

These parameters have been computed as follows:

- Each user $u_i \in USet$ was asked to submit a query Q_i^k and the corresponding $JPTempList_i^k$ was obtained (see Section IV).
- u_i was asked to identify the subset $UserList_i^k \subseteq JPTempList_i^k$ of job proposals that he considered interesting.

³JADE is an open source platform; it can be downloaded from <http://sharon.cse.it/projects/jade>.

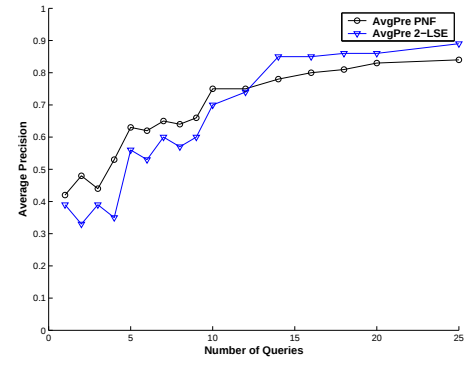


Fig. 2. Average Precision for the PNF and the 2-LSE strategies

- Our prototype was run for obtaining the set $JPList_i^k \subseteq JPTempList_i^k$ of job proposals to be recommended to u_i .
- The Precision Pre_i^k and the Recall Rec_i^k relative to the k^{th} query have been obtained by applying the formulas: $Pre_i^k = \frac{|JPList_i^k \cap UserList_i^k|}{|JPList_i^k|}$, $Rec_i^k = \frac{|JPList_i^k \cap UserList_i^k|}{|UserList_i^k|}$.
- Finally, the Average Precision $AvgPre^k$ and the Average Recall $AvgRec^k$ relative to the k^{th} query have been obtained as $AvgPre^k = \frac{\sum_{i=1..|USet|} Pre_i^k}{|USet|}$, $AvgRec^k = \frac{\sum_{i=1..|USet|} Rec_i^k}{|USet|}$.

Observe that Precision, Recall, Average Precision and Average Recall belong to the real interval $[0, 1]$; specifically, the higher these coefficients are the better the system works.

C. Experimental comparison of the three strategies implemented in our approach

In this section we experimentally compare the strategies for the audacity computation described in Section IV-B.1. Actually, it is necessary to examine only the PNF and the 2-LSE strategies; in fact, the WS strategy is a weighted mean of the two other ones. In the test of the PNF strategy we have set $\bar{\alpha} = 0.55$ whereas in the test relative to the 2-LSE strategy we have set $\bar{\alpha}' = 0.5$, $\bar{\alpha}'' = 0.6$, $\bar{\alpha}''' = 0.4$ (see the Appendix).

For each strategy we have computed the Average Precision and the Average Recall against the number of queries. The obtained results are shown in Figures 2 and 3. From the analysis of these figures we can conclude that:

- If the number of queries carried out by users is low (i.e. lesser than 10), the PNF strategy shows a better performance than the 2-LSE strategy; in fact, its Average Precision and its Average Recall increase up to 0.75 and 0.69, respectively. This behaviour can be motivated by considering that, before 10 queries have been performed, the 2-LSE strategy has still not completed the audacity “tuning” and, hence, the corresponding results are not particularly satisfactory.
- If the number of queries carried out by users is high (i.e. greater than 15), the performance improvements of the PNF strategy are small. On the contrary, the 2-LSE

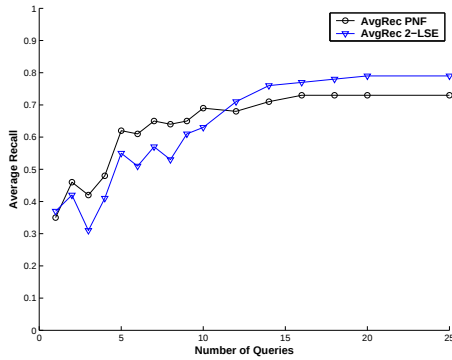


Fig. 3. Average Recall for the PNF and the 2-LSE strategies

strategy shows a very good performance; as an example, after 15 queries, the Average Precision and the Average Recall are 0.85 and 0.76, respectively. This behaviour can be motivated by considering that the 2-LSE strategy “tunes” the audacity coefficient on the basis of the user feedback during all the $k - 1$ previous queries, whereas the PNF strategy considers only the last one. As a consequence, a high number of queries allows the 2-LSE strategy to more precisely predict user expectations.

- During the initial queries, both Average Precision and Average Recall have an oscillatory behaviour; this depends on the fact that, initially, both user profiles and user feedbacks are relatively poor.
- Finally, we observe that the Average Precision is generally greater than the Average Recall; this confirms the results obtained in [28]. As pointed out in this paper, such a feature is to be considered a positive characteristic for a recruitment system; in fact, in this application context, Precision is generally assumed to be more important than Recall since the user could be frustrated by many irrelevant proposals.

Finally, it is worth pointing out that the results of this experiment confirm the results of the experiments about the tuning of γ described in the Appendix. In fact, in that case, we have obtained that, for a small number of queries (i.e., lesser than 10), the value of γ should be high (i.e., the WS strategy should tend to coincide with the PNF strategy); on the contrary, when the number of queries is high, the value of γ should be low (i.e., the WS strategy should tend to coincide with the 2-LSE strategy).

D. Performance of our system in different application domains

This series of experiments was devoted to determine the performance of our system in several application domains; some of them were very generic, other ones were more specialized.

In all existing e-recruitment systems, job proposals can be hierarchically organized on the basis of the application domains they refer to; specifically, the most generic domains (e.g., “Health-Care” or “Information Technology”) are located on the top of the hierarchy; on the contrary, the most specialized ones (like “Biochemical Scientist”) are located at the bottom. This hierarchy can be graphically represented by

means of a tree; each node of the tree, with the exception of the root, represents a domain; a fragment of this tree is graphically shown in Figure 4. With regard to this classification tree, we say that the *specialization level* of a domain D is j if the depth of the node associated with D is j . As an example, the specialization level of the domain “Application Developer” is 3, since the depth of the node representing this domain is 3.

In this test we have computed the Average Precision and the Average Recall obtained by our system when applied to four domains, namely “Information Technology”, “Pharmacy”, “Software Support” and “Biomedical Scientist”, characterized by different specialization levels. During this computation we have used the WS strategy by setting $\gamma(k) = \max\{0, 1 - (\frac{k-1}{25})\}$, $\bar{\alpha} = 0.55$ and $\bar{\alpha}' = 0.5, \bar{\alpha}'' = 0.6, \bar{\alpha}''' = 0.4$. The obtained results are shown in Table I.

From the analysis of this table it is possible to observe that, in general domains (i.e., domains at a specialization level 1 or 2), our system rapidly (i.e., after a few number of queries) obtains good results; however, this performance slightly worsens when the number of queries increases. On the contrary, in specific domains, our system needs several queries for achieving good results but, after this initial phase, it maintains, and even improves, its performance.

This behaviour can be motivated by the following reasoning: during the first queries, users interested in general domains do not have a precise idea about their needs and, consequently, many of the provided recommendations appear interesting to them. On the contrary, users interested in specific domains have a precise idea of their desires already during the initial phase; as a consequence, it is more difficult to satisfy them during the first queries. When the number of queries increases, users of general domains “ripen” a more precise idea of their needs, but the application domain they are interested in is too generic to precisely satisfy their requirements; however, Table I shows that, even in these conditions, our system achieves quite good results. On the contrary, after many queries, the profiles of the users of specific domains are quite rich and this allows our system to precisely identify their needs and to significantly reduce the job proposals search space.

E. Experimental comparison of our system with other e-recruitment prototypes

We have experimentally compared our system with other, already available, ones. Specifically, the systems that we have taken into account were: (i) *CareerBuilder* - www.careerbuilder.com, (ii) *1job* - www.1job.co.uk, (iii) *Job Search* - www.jobsearch.co.uk, (iv) *JobPilot* - www.jobpilot.co.uk, and (v) *Fish4Jobs* - www.fish4.co.uk/iad/jobs. These systems share various similarities; specifically, they operate on the Internet and manage an internal, relational database storing all available job proposals. In addition, they provide job seekers with a graphical interface to retrieve the job proposals they are interested in; a job seeker can use this interface to specify some constraints (e.g., the place where he would like to work), as well as a list of keywords describing the job typology of his interest. Finally, some of these systems allow each

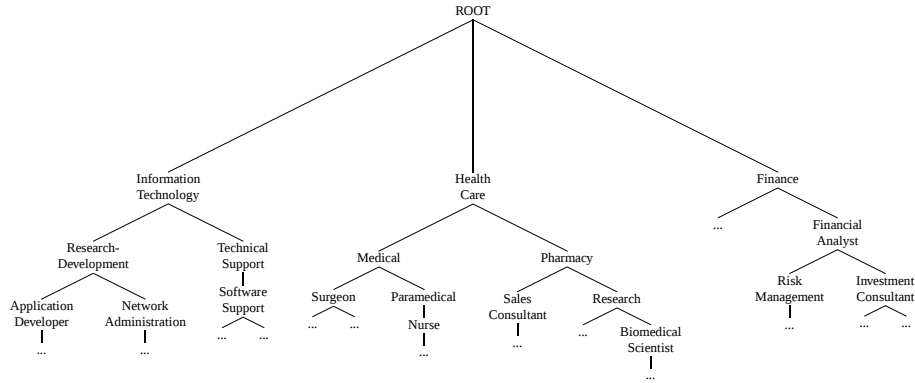


Fig. 4. A fragment of a tree classifying job proposals

TABLE I
PERFORMANCE OF OUR SYSTEM IN DIFFERENT APPLICATION DOMAINS

Domain	Specialization Level	Query 5		Query 10		Query 15		Query 20		Query 25	
		Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec
Information Technology	1	0.73	0.67	0.76	0.70	0.74	0.68	0.72	0.65	0.68	0.61
Pharmacy	2	0.68	0.63	0.72	0.69	0.79	0.71	0.78	0.70	0.77	0.69
Software Support	3	0.54	0.52	0.61	0.58	0.80	0.72	0.85	0.73	0.86	0.75
Biomedical Scientist	4	0.49	0.46	0.60	0.56	0.81	0.73	0.86	0.76	0.90	0.82

user to construct a simple profile by filling a questionnaire; each profile stores user skills (e.g., the foreign languages he knows) as well as a brief curriculum vitae. Since the queries submitted by a job seeker consist of a list of keywords, each system must transform them into SQL queries; for this reason, the underlying DBMS must incorporate Information Retrieval (hereafter, IR) algorithms [29].

Our activity aimed at comparing the accuracy of our system against that of the other systems mentioned previously. To this purpose we asked each user of *USet* to submit some queries; these were processed by the systems into examination and the corresponding Average Precision and Average Recall were computed. As for our system we have chosen the WS strategy and we have set $\gamma(k) = \max \{0, 1 - (\frac{k-1}{25})\}$, $\bar{\alpha} = 0.55$ and $\bar{\alpha}' = 0.5$, $\bar{\alpha}'' = 0.6$, $\bar{\alpha}''' = 0.4$. The results we have obtained are shown in Table II. From the analysis of this table, we can observe that the accuracy of our system is quite satisfying. This interesting result can be justified by the following reasoning:

- In order to score available job proposals, the ranking function adopted by our system considers several aspects of the profile of a user, as well as his reaction to past proposals (see Sections III-B and IV-B); on the contrary, the ranking functions adopted by the other systems into examination consider only some constraints specified by the user (e.g., the salary he would like to earn). Taking into account a large number of issues makes our system more sensible to the real user exigencies; this justifies the improvement of the Average Precision w.r.t. the other systems into examination.
- Our system suggests to users not only the job proposals exactly matching their queries but also those ones somehow semantically related to them. Hence, it is capable of suggesting potentially interesting job proposals that cannot be revealed by traditional IR algorithms; this implies an improvement of the Average Recall w.r.t. the

other systems into examination.

- Our system is capable of considering job proposals available in several other systems; this contributes to improve both the Average Precision and the Average Recall w.r.t. the other systems into examination.

However, neither Precision nor Recall alone are capable of completely capturing the “quality” of the proposals provided by e-recruitment systems. As an example, a key aspect of these systems regards their capability of correctly scoring their job proposals. To better clarify this concept, consider two e-recruitment systems, ERS_1 and ERS_2 , that receive the same query from a user U_i and return the same set of results but in a *reverse order*: in other words, ERS_1 returns the list $\langle JP_1, JP_2, \dots, JP_{n-1}, JP_n \rangle$ whereas ERS_2 returns the list $\langle JP_n, JP_{n-1}, \dots, JP_2, JP_1 \rangle$; this implies that ERS_1 (resp., ERS_2) rates JP_1 (resp., JP_n) as the most relevant proposal for U_i and JP_n (resp., JP_1) as the least relevant one. Finally, assume that U_i fully agrees with the suggestions provided by ERS_1 . In this case ERS_1 and ERS_2 return the same proposals and, consequently, obtain the same Average Precision and the same Average Recall; however, from the previous reasoning, it is possible to conclude that the “quality” of suggestions provided by ERS_2 is lower than the quality of suggestions provided by ERS_1 : in fact, U_i must browse the whole list of suggestions provided by ERS_2 to find the job proposal of his maximum interest and this might be both a boring and a time-consuming activity.

To measure the *ranking capability* of an e-recruitment system we adopted the *Newell Distance* [30], a parameter defined in User Modelling theory. To define the Newell Distance associated with a user U_i and a system to evaluate S_j we need to consider a set $JPSet$ of test job proposals and a pair of functions, sys and usr ; sys (resp., usr) takes a job proposal $JP_k \in JPSet$ as input and returns an integer p belonging to the set $\{1, 2, \dots, |JPSet|\}$ as output; p indicates

TABLE II
AVERAGE PRECISION AND AVERAGE RECALL OF THE SYSTEMS INTO EXAMINATION

System	Query 5		Query 10		Query 15		Query 20		Query 25	
	Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec	Avg Pre	Avg Rec
Our System	0.62	0.61	0.73	0.66	0.81	0.74	0.86	0.76	0.87	0.79
CareerBuilder	0.50	0.48	0.61	0.52	0.68	0.57	0.72	0.63	0.73	0.65
Ijob	0.52	0.46	0.63	0.57	0.71	0.66	0.68	0.67	0.70	0.63
Job Search	0.54	0.44	0.64	0.60	0.69	0.64	0.70	0.65	0.73	0.68
JobPilot	0.44	0.51	0.47	0.53	0.59	0.54	0.67	0.60	0.71	0.66
Fish4Jobs	0.47	0.48	0.50	0.52	0.60	0.55	0.63	0.62	0.69	0.63

TABLE III

AVERAGE NORMALIZED NEWELL DISTANCE ACHIEVED BY THE SYSTEMS INTO EXAMINATION

System	Query 5	Query 10	Query 15	Query 20	Query 25
Our System	0.27	0.20	0.13	0.09	0.06
CareerBuilder	0.40	0.31	0.19	0.15	0.12
Ijob	0.38	0.36	0.22	0.14	0.11
Job Search	0.33	0.29	0.21	0.14	0.09
JobPilot	0.39	0.33	0.29	0.24	0.15
Fish4Jobs	0.38	0.31	0.25	0.19	0.13

that, according to S_j (resp., U_i), JP_k has the p^{th} highest score among all job proposals existing in $JPSet$.

The Newell Distance $\mathcal{N}_{ij}$ associated with U_i and S_j is defined as $\mathcal{N}_{ij} = \sum_{JP_k \in JPSet} |w(usr(JP_k)) \times usr(JP_k) - w(sys(JP_k)) \times sys(JP_k)|$. Here $w(i)$ is a weighting function defined as: $w(i) = \left(\frac{|JPSet| - i}{i}\right)^2$; it assumes its maximum value when $i = 1$ and decreases when i increases; this implies that it gives a different importance to the errors possibly made by the system to evaluate; specifically, if a system is unable to detect the most important job proposal, it commits a more serious error than if it is not capable of identifying the least relevant ones.

The Newell Distance can be properly normalized in such a way to lie in the real interval $[0,1]$; specifically, if we indicate by $\mathcal{N}^{max}$ the maximum value of the Newell Distance measured over all users and systems into consideration, the normalized Newell Distance can be defined as $\hat{\mathcal{N}}_{ij} = \frac{\mathcal{N}_{ij}}{\mathcal{N}^{max}}$. Observe that the lesser $\hat{\mathcal{N}}_{ij}$ is, the better a system works.

In Table III we report the normalized Newell Distance, averaged on all users, obtained for the systems into examination. From the analysis of this table we observe that the Newell Distance obtained by our system is smaller than that obtained by the other systems into evaluation. In our opinion, this result is motivated by considering that:

- The parameters adopted by our system for scoring available job proposals are strictly related to the profile of a user, as well as to his reaction to past proposals; this enhances its capability of correctly identifying the most relevant job proposals.
- Our system continuously monitors user behaviour and is capable of detecting if the relevance of a job proposal for a given user changes over time. On the contrary, the other systems we have considered in our experiments do not consider the possible modifications of user desires over time.

From the previous experiments we can conclude that the recommendations provided by our system are more accurate than those supplied by the other systems into examination; this

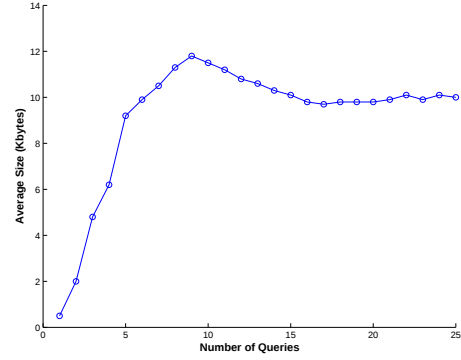


Fig. 5. Average size of user profiles against the number of queries carried out by users

improvement is mainly due to quite a sophisticated management of information about user profiles and past behaviour. This information is combined with classical IR techniques exploited also by the other systems into consideration and allows the most appropriate answers for user needs to be found.

On the other hand, our system requires an additional amount of space for storing user profiles; this is a problem affecting all systems handling and exploiting user profiles. In order to quantify the space requirements of our system for storing user profiles we have performed a final experiment. Specifically, we have computed the average size of user profiles (expressed in Kbytes) against the number of queries carried out by users. The obtained results are shown in Figure 5.

From the analysis of this figure we can observe that, initially, user profiles are generally “poor” and, consequently, the storage space they require is negligible; when a user poses his queries, the system enriches the corresponding profile by inserting new topics. After a “reasonably large” number of queries (i.e., after about 10 queries) user profiles become rich and occupy a certain amount of space; however, this space occupation does not increase during the next queries; in fact, when user profiles become excessively large, the system activates a pruning task in such a way that the number of new topics inserted in a profile is approximately equal to the number of topics removed from it; as a consequence, after 15 queries, the average size of user profiles remains quite constant (specifically, it is about 10 Kbytes).

The previous analysis shows that the quantity of space our system needs for storing user profiles is limited and acceptable; moreover, since user profiles are implemented in XML, it is possible to apply the methodologies illustrated in [31] for handling their space occupation in a more efficient way.

VI. RELATED WORK

Even if e-recruitment is quite a novel research area, several systems devoted to handle such an activity have been already presented in the literature. In this section we aim at positioning our system amongst other related ones. In order to carry out this activity, we have considered three terms of comparison, namely: (i) *Purpose*: e-recruitment systems can be classified as company oriented, if they aim at supporting companies in the selection of new candidates, and seeker oriented, if they support users looking for new job proposals; (ii) *Architecture*: e-recruitment systems could be centralized, if a single computational entity is in charge of managing all activities, distributed, if tasks are partitioned among several computational entities, and mixed, if some tasks are performed in a centralized fashion and other ones are carried out in a distributed way; (iii) *User Profile Construction*: e-recruitment systems might be obtrusive, if they interact with the user for constructing his profile, or unobtrusive, if they learn the profile of a user by monitoring his accesses to the system.

On the basis of these terms of comparison our system can be considered *seeker oriented*, *mixed* and *unobtrusive*.

In the following we compare our approach with other related ones and highlight similarities and differences existing among them. Table IV provides a summary of the in-depth comparison we carry out in the following subsections.

A. Approach of [32]

[32] proposes a recommender system devoted to support users looking for new job proposals. The system operates as follows: (i) it classifies each user according to his personal traits (e.g., shy/sociable or talkative/taciturn); (ii) a user queries it to retrieve new job proposals; (iii) it ranks retrieved job proposals according to their similarity to the personal traits of the user. There are some similarities between our approach and [32]; in fact, both of them: (i) are seeker oriented; (ii) can cooperate with existing e-recruitment Web sites; (iii) classify job proposals according to their relevance for the user. As for differences, we may notice that: (i) in [32] user profiles are constructed by means of psychological tools (e.g., questionnaires) whereas our system obtains information about users unobtrusively, by watching their interactions with it; (ii) in [32] no mechanisms for user profile update are provided; (iii) the architecture of [32] is centralized whereas our system is mixed, since the Recruitment Agent performs most of the activities connected with the selection of the job proposals best fitting user exigencies, but User Agents, Wrapper Agents and Company Agents continuously cooperate with the Recruitment Agent for performing the whole recruitment task (see Section II). Interestingly enough, our system might inherit some features typical of the approach of [32]; specifically, the user profiles managed in our system might include information about user personal traits, analogous to that handled in [32], to enhance the job search process.

B. Approach of [33]

In [33] the authors present a probabilistic e-recruitment system that uses both content-based and collaborative filter-

ing techniques to produce recommendations. There are some similarities between our approach and that described in [33]; more specifically, both of them: (i) provide a mechanism for automatically and unobtrusively learning user preferences; (ii) take into account the user feedback that influences the system behaviour: specifically, in our approach, the knowledge of the job proposals accepted/rejected by the user is exploited for automatically tuning the system audacity; analogously, in [33], user preferences influence the coefficients of the probabilistic model adopted for deriving recommendations; (iii) are seeker oriented. As for differences, we may notice that: (i) [33] exploits a probabilistic model for deducing new recommendations; such an approach is very refined but it might be excessively time-consuming; (ii) our system is mixed whereas the approach of [33] is centralized; (iii) the approach of [33] is hybrid, whereas our own is content-based.

C. CASPER

In [28], [34] the system CASPER is described. CASPER is a client-server system that *separately* exploits *collaborative filtering* and *content-based* techniques to provide new job recommendations. There are some similarities between our approach and CASPER; in fact, both of them: (i) are seeker oriented; (ii) construct user profiles by unobtrusively monitoring user activities; (iii) follow similar criteria for estimating user preferences; (iv) are mixed. As for differences we may notice that: (i) CASPER can operate either as a content-based or as a collaborative filtering recommender system; on the contrary, our system is content-based; (ii) CASPER does not provide tools for modelling the semantics of a job proposal; on the contrary, our approach uses an XML Schema for representing the main features of each job proposal; these features play a key role during the recommendation process.

D. Personnel Mall

In [35] the *Personnel Mall* system is proposed. *Personnel Mall* is an agent based platform conceived for matching job seekers with companies in a distributed (and electronic) job marketplace. Specifically, *Personnel Mall* defines a set of rules to represent and manage the preferences/exigencies of job seekers and companies and uses them during the matching process. There are some similarities between our approach and *Personnel Mall*; in fact, both of them: (i) use the agent technology to perform e-recruitment activities; (ii) model job marketplace as a complex system in which heterogeneous components (i.e., companies and individuals) incessantly interact. As for differences, we may observe that: (i) *Personnel Mall* is company oriented; (ii) in *Personnel Mall* the matching between a job seeker and a job proposal depends not only on *subjective variables* (e.g., the personal interests of a user) but also on *economic parameters* (e.g., the quantity of labor that companies would like to hire for a certain wage and the quantity of labor that a job seeker would like to supply); (iii) *Personnel Mall* aims at maintaining the conditions of equilibrium in the job marketplace: as an example, it is capable of dynamically raising/lowering wages in response to labor surpluses/shortages; such a feature is not present in our system;

TABLE IV
A COMPARISON OF SOME E-RECRUITMENT SYSTEMS

System	Purpose	Architecture	User Profile construction	Additional Features
<i>Our approach</i>	Seeker Oriented	Mixed	Unobtrusive	It exploits Agent Technology and XML
<i>Supjarende et al.</i> [32]	Seeker Oriented	Centralized	Obtrusive	It considers the personal traits of a user
<i>Farber et al.</i> [33]	Seeker Oriented	Centralized	Unobtrusive	It is an hybrid recommender system
<i>CASPER</i> [28], [34]	Seeker Oriented	Mixed	Unobtrusive	It separately exploits content based and collaborative filtering techniques
<i>Personnel Mall</i> [35]	Company Oriented	Distributed	Obtrusive	It exploits the agent technology and a matching algorithm
<i>Dafoulas et al.</i> [36]	Company Oriented	Centralized	Obtrusive	It allows online interviews to be performed
<i>CommOnCV</i> [37]	Seeker Oriented	Centralized	Obtrusive	It exploits Semantic Web languages to model a curriculum vitae
<i>e-SRS</i> [38]	Company Oriented	Distributed	Obtrusive	It exploits both psychometric techniques and clustering algorithms to recruit candidates

(iv) *Personnel Mall* does not provide mechanisms for updating the preferences and the exigencies of job seekers; (v) *Personnel Mall* is obtrusive; (vi) *Personnel Mall* is distributed; on the contrary, our system is mixed.

E. Approach of [36]

In [36] an agent based approach for supporting e-recruitment activities is proposed. This system embodies the functionalities typical of a traditional e-recruitment Web site (e.g., a user can insert/update his profile, a company can post new job proposals, and so on); moreover, it allows companies to perform an *on-line interview* of candidates; this interview is useful for both companies (that can perform a preliminary screening of candidates) and job seekers (that can enrich their profiles by storing their past interviews). It is possible to identify only few similarities between our approach and [36]; specifically, both of them: (i) define and manage user profiles; (ii) use the agent technology. As for differences we observe that: (i) [36] is company oriented; (ii) [36] provides a *layered* and *centralized* architecture whereas our approach is mixed; (iii) [36] is obtrusive.

F. CommOnCV

In [37] the authors propose *CommOnCV*, a system capable of representing and managing a curriculum vitae by means of Semantic Web tools. The approach implemented by *CommOnCV* is based on the concept of *competency* that is used to represent the knowledge/skills owned by a job seeker; competencies are defined and described by means of suitable ontologies. In addition, *CommOnCV* defines a curriculum vitae as a network of competencies and represents it by means of Semantic Web languages, like RDF/RDFS or DAML+OIL. There are some similarities between our approach and *CommOnCV*; in fact, both of them: (i) exploit ontologies to allow companies and job seekers to have a common reference for representing competencies and tasks; (ii) represent the contents of a job proposal or a curriculum vitae by means of suitable tools (i.e., XML in our approach, and Semantic Web languages in [37]); (iii) are seeker oriented. As for differences, we may observe that: (i) *CommOnCV* is centralized and obtrusive whereas our approach is mixed and unobtrusive; (ii) *CommOnCV* is not a recommender system. Our system might inherit some features from *CommOnCV*. Specifically, analogously to *CommOnCV*, it might represent a user profile as a network of interests, instead of a list of topics; such a choice would allow a better comprehension of the relationships existing among user interests, as well as a better evaluation of the relevance of

each interest. However, it should be taken into account that the exploitation of a network, instead of a list, for representing user interests, would cause an increase of the computational complexity of our system.

G. e-SRS

In [38] a multi-agent platform, called *e-SRS* (e-Sales Recruitment System), for recruiting and benchmarking sales persons, is proposed. *e-SRS* exploits psychometric tools (e.g., questionnaires) for classifying each user in a specific *category*; it considers four user categories representing specific *behavioral models* (e.g., if a user rarely/frequently trusts others, if a user is/is not aggressive, and so on). This categorization can be improved by applying a suitable clustering algorithm (*fuzzy K-means*). The obtained results can be considered by a human expert for selecting the best candidates. There are some similarities between our approach and *e-SRS*. In fact, both of them: (i) exploit the agent technology and artificial intelligence tools to overcome the limitations of existing recruitment services; (ii) construct, handle and exploit accurate user profiles. As for differences, we may observe that: (i) *e-SRS* is company oriented; (ii) it is obtrusive; (iii) it is distributed, whereas our system is mixed; (iv) it is very specific, since it has been conceived for managing the recruitment of *sales persons*; on the contrary, our approach is generic, since it can support the recruitment activities in *several professional areas*; due to this reason, *e-SRS* produces accurate and refined results in its application area but its extension to other professional categories seems to require a valuable effort. *e-SRS* might be combined with our approach; specifically, in both the recruitment and the benchmark of sales persons, it might take into account not only the behavioural aspects of a job candidate but also his preferences and “constraints”.

VII. CONCLUSIONS AND HINTS FOR THE FUTURE

In this paper we have presented an XML-based, multi-agent system for supporting e-recruitment services. We have seen that our system is characterized by various interesting capabilities, namely: (i) it allows a uniform management of heterogeneous job proposals; as a consequence, a job seeker can pose his queries across different, and presumably heterogeneous, job databases; (ii) it is agent- and XML-based; as a consequence, it can easily cooperate with company information systems; (iii) the job proposal selection algorithm takes into account information about possible interests that the user did not consider in the past but that appear to be potentially interesting for him in the future; (iv) it is capable of handling

different recommendation strategies; (v) its recommendation strategies encompass some mathematic tools already applied in many fields.

In the paper we have illustrated our system in detail, we have shown the obtained experimental results and, finally, we have compared it with other related systems already presented in the literature.

Various application contexts might benefit from our research efforts. Some of the most promising ones are the following:

- *Team Building.* In many organizations it is necessary to match individuals for composing a team working on the same project. Such an activity, often called *team building* or *partnership building* [39], is becoming an increasingly popular strategy for encouraging and boosting production. Team building has been studied in a large variety of scientific areas: for instance, Human Resource based approaches consider the skills and the abilities owned by each individual as a leading criterium to compose teams; analogously, sociological and psychological approaches focus on the role of trust among individuals as a key element for the success of a team. Team building activities generally consist of two phases, namely: (i) identification of potential members of a team, and (ii) choice of individuals that really compose a team, among the previously defined potential candidates. As observed in [39], while various Web sites offer tools for effectively carrying out phase (i), decision support for phase (ii) is still rudimentary. In our opinion, our system might offer a concrete contribution in this area. Specifically, since our approach manages a large volume of data stored in user profiles, it can elaborate this information to compute the "affinity degree" existing among two individuals. In other words, an analysis of the personal features of an individual, as well as of its preferences and exigencies, allows managers: (i) to assign each individual to a team; (ii) to predict if trust can be established among the potential members of a team, even if they do not share a common work history.
- *Task Assignment.* A classical activity of Human Resource managers consists of associating individuals to tasks; this activity should be carried out in such a way to exalt the skills and the capabilities of individuals. Since this activity has a great impact on the business success, an extensive research on it has been performed in the past [40]. In our opinion our system could be used to effectively solve the problem of assigning individuals to tasks. Specifically, information stored in user profiles could be exploited for capturing user aptitudes/preferences whereas the XML-based model describing job proposals could be used for representing task features. A matching between a user profile and a job proposal description could be adopted for computing the so called *Person-Job Fit* (PJF), a parameter used by psychologists to measure the suitability of a candidate for a specific job.
- *Outsourcing.* In recent past businesses have outsourced a large variety of activities for improving the quality of services and products, for reducing the duration of the production cycle and for lowering costs. However, an

excessive reliance on outsourcing may negatively affect business performance: for instance, it might lead to a reduced technological innovation [41] or to a limited capability of competing with outsourcing partners [42]. Our system could be adopted to support business managers to decide about the effectiveness of an outsourcing activity; specifically, it might analyze the information stored in user profiles for assessing the capability of the internal components of an organization of executing a given task and to evaluate if it is/is not convenient its outsourcing.

As for future work, we plan to contribute to the implementation of the ideas mentioned previously. In addition, we plan to enrich our system by providing it with more powerful algorithms that try to predict the future interests of a user, as well as by designing and implementing modules for supporting companies looking for candidates. This last feature would allow the realization of a *hybrid* e-recruitment system, embodying the functionalities of both seeker oriented and company oriented systems. Finally, we plan to study the possibility to integrate our system with an e-learning framework for realizing a system capable of suggesting (and, next, teaching) to a user the skills he should acquire for accessing new, more appealing, job proposals.

REFERENCES

- [1] "Bureau of labor statistics, U.S. Department of Labor," <http://stats.bls.gov/opub/ted/2002/nov/wk1/art03.htm>.
- [2] F. Liu, C. Yu, and W. Meng, "Personalized Web search for improving retrieval effectiveness," *IEEE Transactions on Knowledge and Data Engineering*, vol. 16, no. 1, pp. 28–40, 2004.
- [3] P. Resnick and H. Varian, "Recommender systems," *Communications of the ACM*, vol. 40, no. 3, pp. 56–58, 1997.
- [4] H. Lieberman, "Letizia: An agent that assists Web browsing," in *Proc. of the International Joint Conference on Artificial Intelligence (IJCAI'95)*. Montreal, Quebec, Canada: Morgan Kaufmann, 1995, pp. 924–929.
- [5] M. He, N. Jennings, and H. Leung, "On agent-mediated electronic commerce," *IEEE Transactions on Knowledge and Data Engineering*, vol. 15, no. 4, pp. 985–1003, 2003.
- [6] O. Zaiane, "Building a recommender agent for e-learning systems," in *Proc. of the International Conference on Computers in Education (ICCE 2002)*. Auckland, New Zealand: IEEE Press, 2002, pp. 55–59.
- [7] M. Wooldridge, *An Introduction to MultiAgent Systems*. Chichester: John Wiley & Sons, 2002.
- [8] R. Lawrence, G. Almasi, V. Kotlyar, M. Viveros, and S. Duri, "Personalization of supermarket product recommendations," *Data Mining and Knowledge Discovery*, vol. 5(1-2), pp. 11–32, 2001.
- [9] D. Gilsinn, H. Bandy, and A. Ling, "A spline algorithm for modeling cutting errors on turning centers," *Journal of Intelligent Manufacturing*, vol. 13, no. 5, pp. 391–401, 2002.
- [10] S. Sadray, S. Rezaee, and S. Rezakhah, "Non-linear heteroscedastic regression model for determination of methotrexate in human plasma by high-performance liquid chromatography," *Journal of Chromatography B, Analytical Technologies in the Biomedical and Life Sciences*, vol. 787, no. 2, pp. 293–302, 2003.
- [11] L. Yikang, "Low-pass filtered least squares estimators of cointegrating vectors," *Journal of Econometrics*, vol. 85, no. 2, pp. 289–316, 1998.
- [12] A. Cesta and D. D'Aloisi, "Building interfaces as personal agents: a case study," *ACM SIGCHI Bulletin*, vol. 28, no. 3, pp. 108–113, 1996.
- [13] C. Hsinchun, C. Yi-Ming, M. Ramsey, and C. Yang, "An intelligent personal spider (agent) for dynamic Internet/intranet searching," *Decision Support System*, vol. 23, no. 1, pp. 41–58, 1998.
- [14] B. Grosz and Y. Labrou, "An approach to using XML and a rule-based content language with an agent communication language," in *Proc. of the IJCAI-99 Workshop on Agent Communication Language*, Stockholm, Sweden, 1999, pp. 96–117.
- [15] "World Wide Web Consortium - XML query," <http://www.w3.org/XML/Query>.
- [16] "Document Object Model," <http://www.w3.org/DOM/>.

- [17] N. Haque, N. Jennings, and L. Moreau, "Resource allocation in communication networks using market-based agents," *International Journal on Knowledge Based Systems*, vol. 18, no. 4-5, pp. 163-170, 2005.
- [18] R. Dash, D. Parkes, and N. Jennings, "Computational mechanism design: A call to arms," *IEEE Intelligent Systems*, vol. 18(6), pp. 40-47, 2003.
- [19] R. Carreira, J. Crato, D. Goncalves, and J. Jorge, "Evaluating adaptive user profiles for news classification," in *Proc. of the International Conference on Intelligent User Interface (IUI 2004)*. Funchal, Madeira, Portugal: ACM Press, 2004, pp. 206-212.
- [20] A. Thor and E. Rahm, "AWESOME - a data warehouse-based system for adaptive website recommendations," in *Proc. of the International Conference on Very Large Databases (VLDB 2004)*. Toronto, Canada: Morgan Kaufmann, 2004, pp. 384-395.
- [21] J. Wahba and Y. Zenou, "Density, Social Networks and Job Search Methods: Theory and Application to Egypt," The Research Institute of Industrial Economics, Tech. Rep. 629, 2004, available at <http://ideas.repec.org/p/hhs/iuiwop/0629.html>.
- [22] J. Han and M. Kamber, *Data Mining: Concepts and Techniques*. Morgan Kaufmann Publishers, 2001.
- [23] R. Baeza-Yates and B. Ribeiro-Neto, *Modern Information Retrieval*. Addison Wesley Longman, 1999.
- [24] G. Golub and C. V. Loan, *Matrix Computations*, third edition. Johns Hopkins University Press, 1996.
- [25] V. Pan, "Solving a Polynomial Equation: Some History and Recent Progress," *SIAM Review*, vol. 39, no. 2, pp. 187-220, 1997.
- [26] D. Bertsekas, *Nonlinear Programming*. Belmont, Massachusetts, USA: Athena Scientific, 1999.
- [27] FIPA, "Foundation for Intelligent Physical Agents Specifications," <http://www.fipa.org>.
- [28] K. Bradley and B. Smyth, "Personalized information ordering: a case study in online recruitment," *Knowledge-Based Systems*, vol. 16, no. 5-6, pp. 269-275, 2003.
- [29] V. Hristidis, L. Gravano, and Y. Papakonstantinou, "Efficient IR-style keyword search over relational databases," in *Proc. of the International Conference on very large Databases (VLDB 2003)*, Berlin, Germany, 2003, pp. 850-861.
- [30] S. Newell, "User models and filtering agents for improved internet information retrieval," *User Modeling and User-Adapted Interaction*, vol. 7, no. 4, pp. 223-237, 1997.
- [31] H. Jagadish, S. Al-Khalifa, A. Chapman, L. Lakshmanan, A. Nierman, S. Paparizos, J. Patel, D. Srivastava, N. Wiwatwattana, Y. Wu, and C. Yu, "TIMBER: A native XML database," *The VLDB Journal*, vol. 11, no. 4, pp. 274-291, 2002.
- [32] S. Supjarende, Y. Temtanapat, and U. Phalavonk, "Recruitment filtering with personality-job fit model," in *Proc. of the IEEE International Conference on Information Technology: Coding and Computing (ITCC 2002)*. Las Vegas, Nevada, United States: IEEE Computer Society, 2002, pp. 46-53.
- [33] F. Farber, T. Keim, and T. Weitzel, "An automated recommendation approach to personnel selection," in *Proc. of the Americas Conference on Information Systems (AMCIS'2003)*. Tampa, Florida, United States: Association for Information System Electronic Library, 2003, pp. 2329-2339.
- [34] R. Rafter, K. Bradley, and B. Smyth, "Automated collaborative filtering applications for online recruitment services," in *Proc. of the International Conference on Adaptive Hypermedia and Adaptive Web-Based Systems (AH 2000)*. Trento, Italy: Lecture Notes in Computer Science, Springer Verlag, 2000, pp. 363-368.
- [35] W. Gates and M. Nissen, "Designing agent-based electronic employment markets," *Electronic Commerce Research*, vol. 1, no. 3, pp. 239-263, 2001.
- [36] G. Dafoulas, A. Nikolaou, and M. Turega, "E-Services in the Internet Job Market," in *Proc. of the Hawaii International Conference on System Sciences (HICSS '03)*. Big Island, Hawaii, United States: IEEE Computer Society, 2003.
- [37] M. Harzallah, M. Leclerc, and F. Trichet, "CommOnCV: modelling the competencies underlying a curriculum vitae," in *Proc. of the International Conference on Software Engineering and Knowledge Engineering (SEKE'02)*. Ischia, Italy: ACM Press, 2002, pp. 65-71.
- [38] R. Khosla and T. Goonesekera, "An online multi-agent e-sales recruitment system," in *Proc. of the IEEE/WIC International Conference on Web Intelligence (WI 2003)*. Halifax, Canada: IEEE Computer Society Press, 2003, pp. 111-117.
- [39] T. Keim and T. Weitzel, "An integrated approach to online partnership building," in *Proc. of the Hawaiian International Conference on System Sciences (HICSS '05)*. Big Island, Hawaii, United States: IEEE Computer Society Press, 2005.
- [40] M. O'Connell, D. Doverspike, A. Cober, and J. Philips, "Forging work-teams: Effects of the distribution of cognitive ability on team performance," *Applied Human Resource Management Research*, vol. 6, pp. 115-128, 2001.
- [41] M. Kotabe, *Global sourcing strategy: R&D, manufacturing, and marketing interfaces*. New York, United States: Quorum, 1992.
- [42] K. Gilley, C. Greer, and A. Rasheed, "Human resource outsourcing and organizational performance in manufacturing firms," *Journal of Business Research*, vol. 57, no. 3, pp. 232-240, 2004.